## **TILES SUPPORTS**







### **INDEX**


- 1. Code Registry
- 2. Use
- 3. Load test
- 4. Technical Specification

### 1. CODE REGISTRY

Product Code	Description	Measure (mm)	Weight	Colour	Pkg. / Pallet
TER09-1120	Tile support	-	48 gr/pc.	Black	200 pcs / 2.400 pcs
TER09-1121/1	Leveller for tile	thickness 1	38 gr/pc.	Black	1.000 pcs / 10.000 pcs
TER09-1121	Leveller for tile	thickness 3	20 gr/pc.	Black	500 pcs / 10.000 pcs

#### **MATERIAL**

Made of PP (polypropylene).

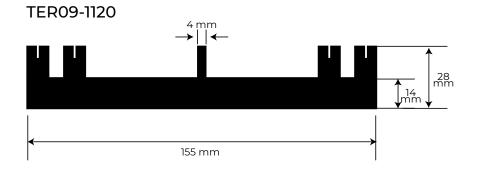












# **TILES SUPPORTS**

### **2. USE**

For lifting of flooring plates in grit and cement, enabling the flow of rainwater, thus avoiding direct contact with any waterproofing.


### 3. LOAD TESTS

The article has undergone to a growing load by using a hydraulic press. The test punch used has a diameter of 250 mm.

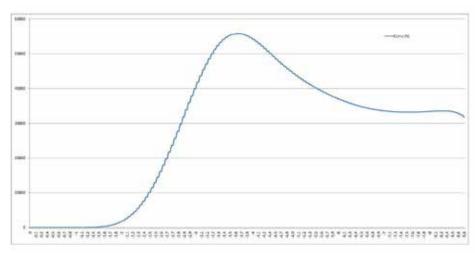

	Maximum Load (N)	Failure (mm)
Test 01	55.740	-2,50
Test 02	56.240	-2,30
Test 03	48.370	-2,40
Average	53.450	-2,40





### 4. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.O.TER09.112x	Supply and installation of Tiles support for the positioning of plates in grit and cement.  Height 14 mm (overall dimensions 28 mm) and diameter 155 mm.  It can be splitted up in 4 pieces and connected with a leveler from 1 to 3 mm.  Made of PP (polypropylene).  For lifting of flooring plates in grit and cement, enabling the flow of rainwater, thus avoiding direct contact with any waterproofing.		
Dak.O.TER09.1120		рс.	-
Dak.O.TER09.1121/1	Thickness 1 mm	pc.	-
Dak.O.TER09.1121	Thickness 3 mm	рс.	-